



Section

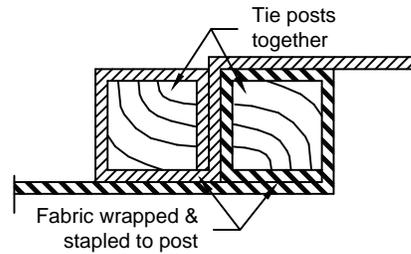

Detail for joining sections

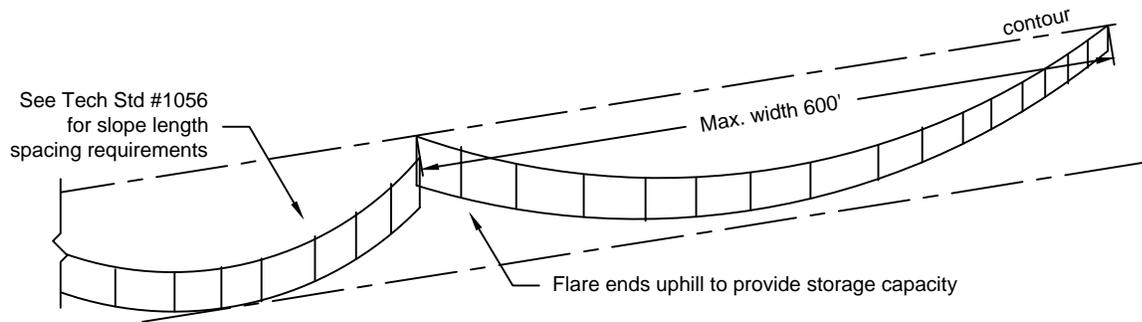

Perspective

Notes

1. Posts damaged on driving shall be replaced.
2. Erosion control shall be maintained daily.
3. Staple to post on upslope side in 3 places, or zip ties (50 lbs tensile) per post in top 8" of fabric.
4. Excavate a trench a minimum of 4" wide & 6" deep to bury and anchor the geotextile fabric. Fold material to fit trench and backfill & compact trench with excavated soil, prior to installing the posts.
5. Wood posts shall be a minimum size of 1-1/8" x 1-1/8" of oak or hickory, spread at a maximum of 3 feet for non-woven silt fence and a maximum of 8 feet for woven fabric.
6. Shall comply with WDNR Technical Std. #1056.
7. The ends of the fence shall be extended up slope to prevent water from flowing around the ends of the fence.
8. Silt fence shall be placed on the contour.
9. Silt fence shall be removed once the disturbed area is permanently stabilized and no longer susceptible to erosion.



Silt Fence

Date Revised
August 2014

Plate Number
3125-02

Sheet 1 of 1

