



2'x3' catch basin

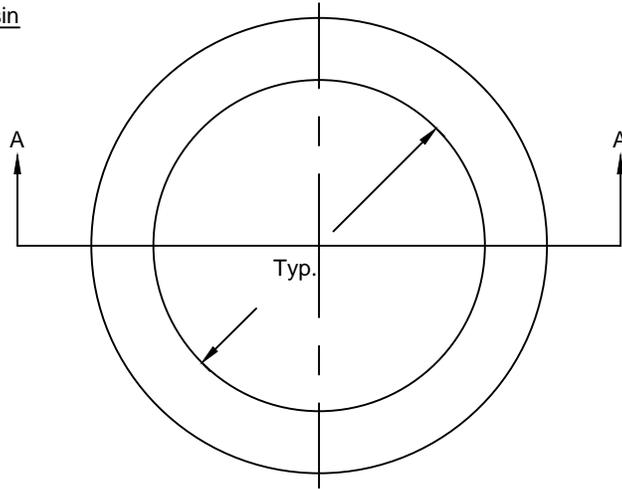

Manhole

Notes

1. All adjusting rings shall be high density polyethylene (HDPE) as manufactured by Ladtech or approved equal.
2. Utilize flat and sloping units to match the required slope and/or grade of the structure.
3. Use 3/16 to 1/4 inch bead of approved butyl sealant or a 3/8 inch round rope of ASTM C-990 between individual rings, between rings and structure, and between rings and the casting.
4. Sealant shall be applied in a location that it makes contact the full 360 degrees.
5. Manufactured per ASTM D-4976 standards.
6. New construction, 3 rings maximum.



Section A-A



Adjusting Rings

Date Revised
August 2014

Plate Number
3300-02

Sheet 1 of 1

